

Series 9100R Flush Glazed Window Wall Thermally Broken Aluminum Casement/ Awning/Fixed Window

Hardware Options

The standard handles for the Series 9100R operable vents are cam handles made from zinc alloy. 1 or 2 handles will be included, depending on the operable vent size (refer to the chart below). These handles lock positively against a PVC mounted keeper.

Handles and mounted keeper are available in black, white, and silver.

The 60 degree hinge is restricted to 4".

Vent Sizes with 1 or 2 Cam Handles

	1 CAM HANDLE	2 CAM HANDLES
AWNING WIDTH	UP TO 30"	30" TO 48"
CASEMENT HEIGHT	UP TO 30"	30" TO 60"


Options

1. Multi-point locking hardware. The multi point handle is available in black, white, and silver. The multi points, not visible when window is in closed position, are available in black and white only. When multipoint locks are selected, the minimum vent height for a casement is 22" but shall not exceed 60" in height. The minimum vent width is for an awning is 22" but shall not exceed 48" in width.
2. 90° egress hinge.
3. Custodial restrictors.

Standard Interior Cam Handle


Interior cam handle, made from zinc alloy, positively locks against a mounted keeper. Available in black, white and silver.

HARWARE TYPE	COLOUR
STANDARD	BLK
	WHT
	SVR

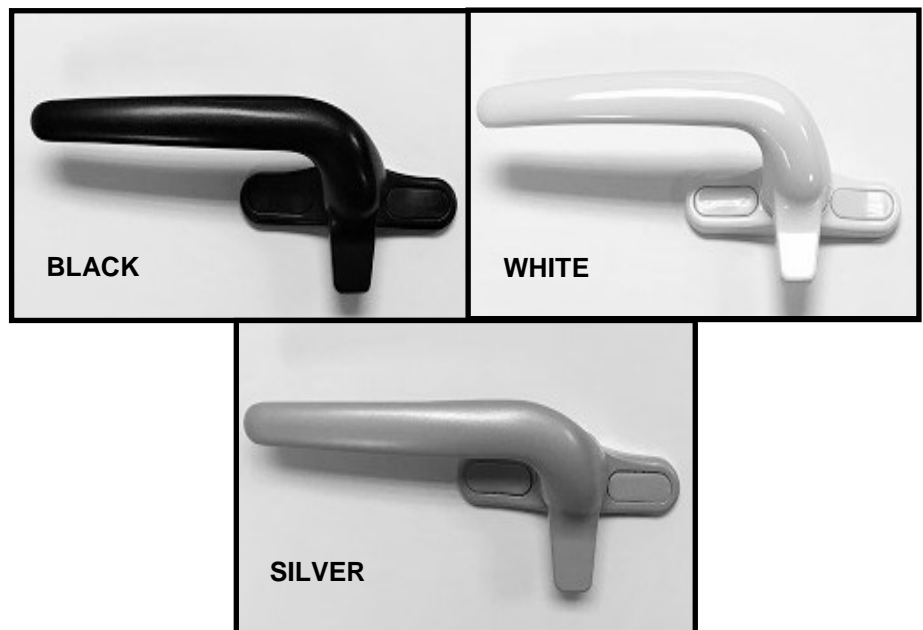


Mounted Keeper for Standard Interior Handle

Interior mounted keeper, made from PVC, enables handle to positively lock against it. Available in black, white and silver.

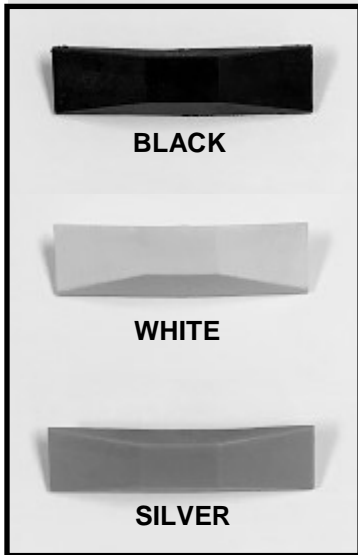

Multi-Point Locking Hardware

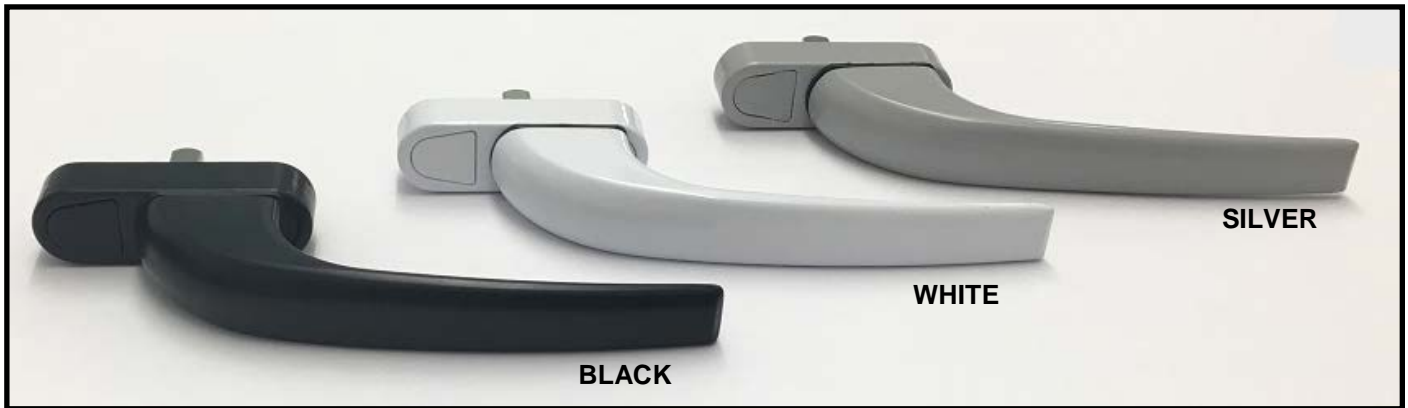

The multi point handle is available in black, white, and silver. The multi points are not visible when the window is closed. They are available in black and white only. When multipoint locks are selected, the minimum vent height for a casement is 22" but shall not exceed 60" in height. The minimum vent width for an awning is 22" but shall not exceed 48" in width.

HARWARE TYPE	COLOUR
MP	BLK
	WHT
	SVR